


ANKAROLINA®



ANKAROLINA® 56 (185' long) –the anchoring system

COMPACT, FLEXIBLE AND EASE OF OPERATION!

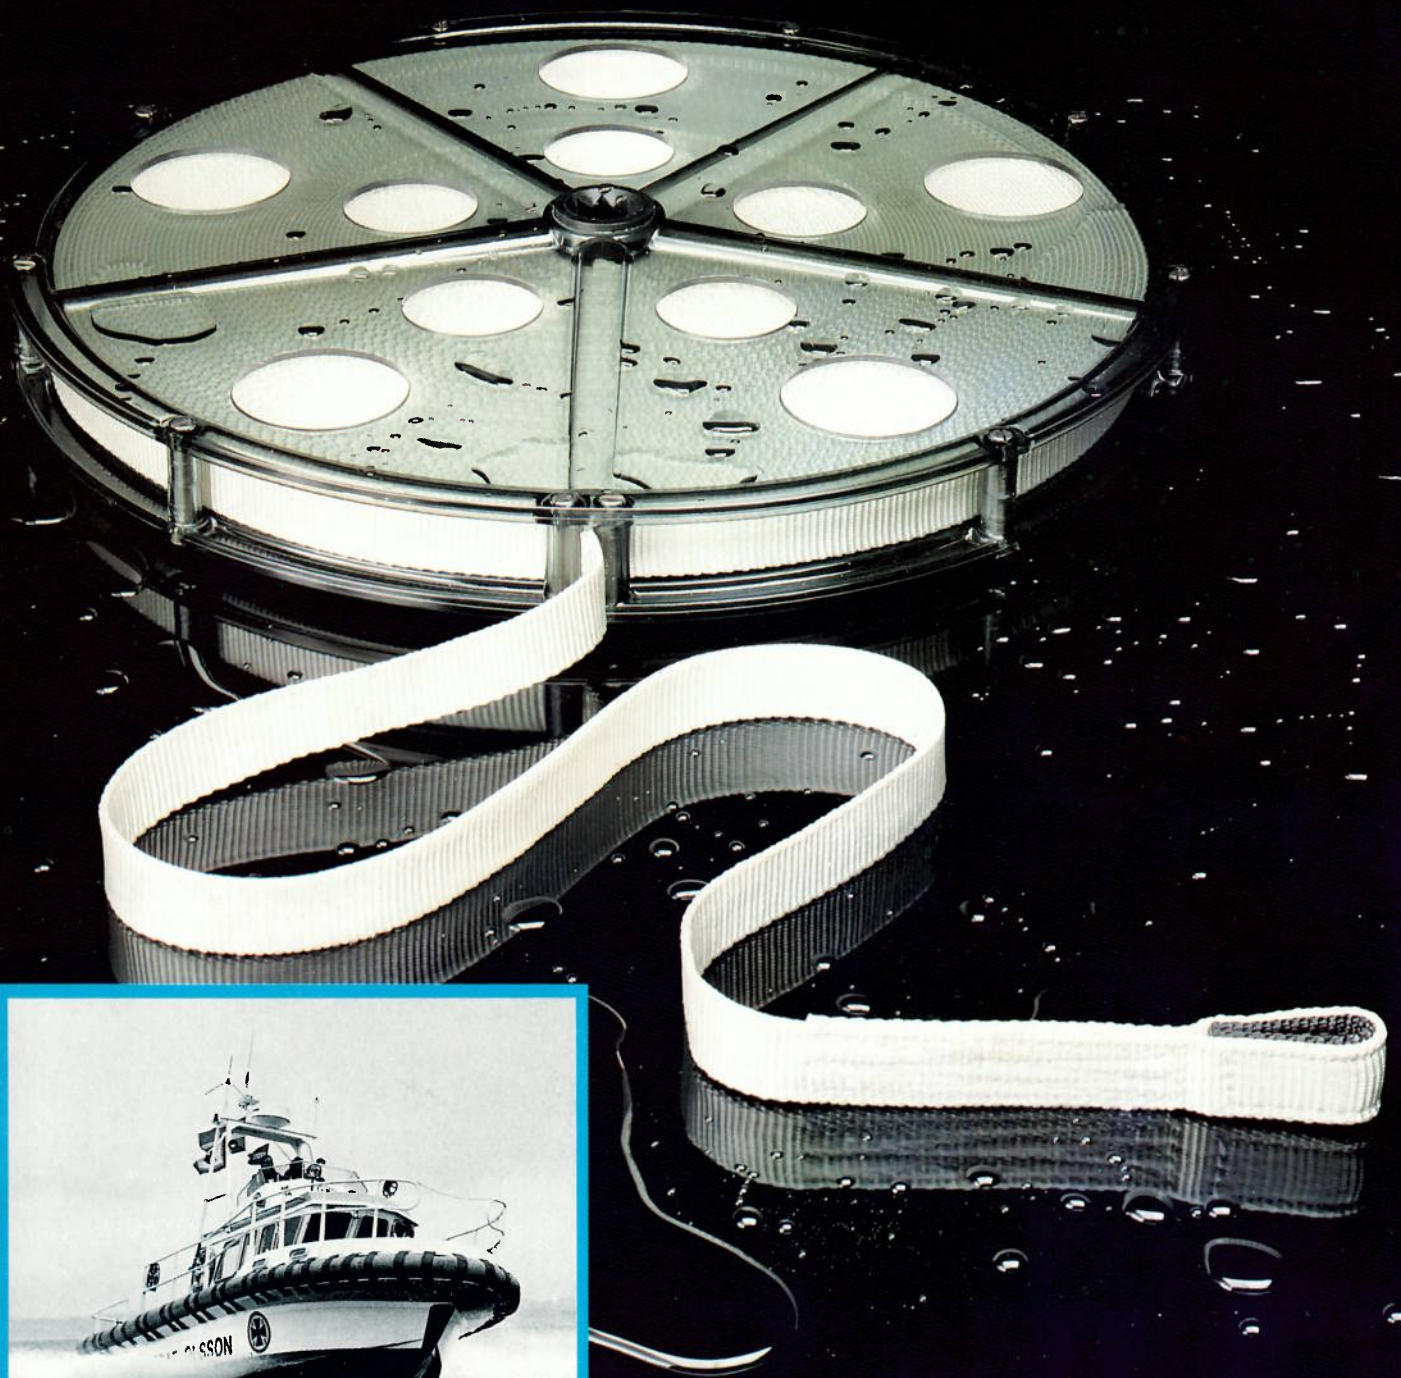

No matter how experienced you are, anchoring and docking can become a hassle. The strength, compactness and flexibility of webbing together with lower weight as compared to rope offers new innovation to traditional anchoring and docking methods. Ankarolina 56 has a breaking strength of approx. 5,500 lbs (2.5 metric tons) corresponding to 1/2" or 5/8" regular anchor– or docking

rope. The reel can easily be attached to the pulpit, bulkheads, hatches etc, or where it best suits your needs. The 185' of webbing is sufficient for even the most demanding anchoring situations. A regular rope absorbs approx. 0.4–0.7 gallons of water for 185' of length. The whole length of Ankarolina 56 absorbs only 0.07 gallons. Additionally, the flat webbing is safer to step on.




You can stow the anchor without unshackling the line. The smooth webbing is flat, so you won't damage the hatchcover hinge.



With Ankarolina your anchor is always ready to use, with or without chain.



The mounting kit provided allows easy attaching to most places on board, for example to the bow pulpit.

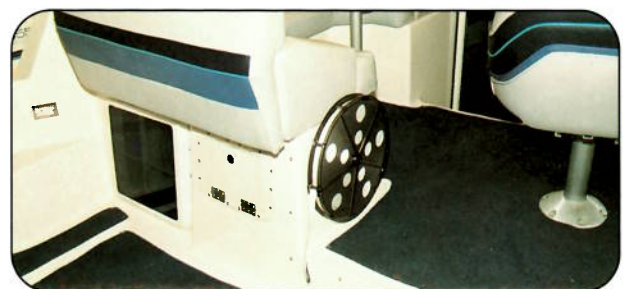


Ankarolina is also suitable for motorboats and sailboats.

Anchoring is easy using Ankarolina: To shackle the anchor, with or without chain, pull out about 7' (2 m) of line and simply attach the anchor. Ankarolina pays out automatically without tangling or twisting. To anchor, simply tension the webbing and make fast to a cleat. To retrieve the anchor, first wind in the reel to take up the slack.

Ankarolina is not a winch, so you must retrieve the anchor by hand or with your own winch. Simply wind in the webbing using the provided handle or any standard winch handle. Guiding the line with your free hand will make winding faster and easier. Ankarolina 56 is equipped with a reinforced loop at the end of the line.

ANKAROLINA® 35 (115' long) –the anchoring system

COMPACT, FLEXIBLE AND EASE OF OPERATION

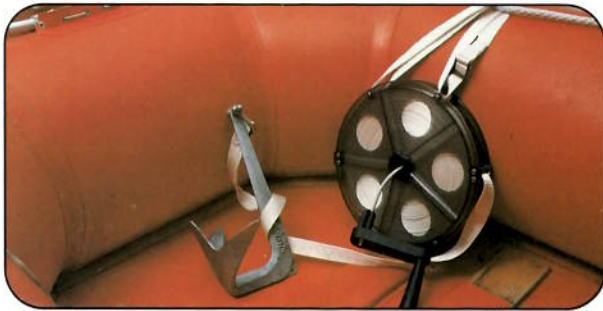

An emergency anchor for inflatables. Great to have if you should lose an oar or if your motor stalls.



A compact reel which, when attached to the center console, can be used for anchoring and stern- or bow docking. Easy to use and takes up minimum space.



The centerboard is a natural place for the reel.



Another mounting on a boat with a motorwell. The anchor can be stored under the motor. The webbing can also be made fast to the bow cleat.

The Ankarolina 35 is best suited to be used on small or mid-size crafts, and/or as a complement to the larger Ankarolina 56. The construction is similar to that of Ankarolina 56, using flat webbing instead of rope. This means no more struggling with tangled and wet anchor lines. The reel is easily mounted on pulpits, bulkheads or hatches.

Anchoring is easy using Ankarolina. To shackle the anchor, with or without chain, pull out about 7' (2 m) of line.

Then attach the anchor. Ankarolina pays out automatically without tangling or twisting. To anchor, simply tension the webbing and make fast to a cleat. To retrieve the anchor, first wind in the reel to take up the slack. Ankarolina is not a winch, so you must retrieve the anchor by hand or with your own winch. Simply wind in the webbing using the provided handle or any standard winch handle. Ankarolina 35 is equipped with a reinforced loop at the end of the line.

ANKAROLINA® 24 (80' long) –for mooring/docking/towing




Ankarolina 24 is especially suited for docking or mooring. It can easily be mounted on pulpits or under the bow hatch. The webbing is 80' (24 m) long and has a breaking strength of 5,500 lbs (2.5 tons). It is equipped with an 8 inch loop to facilitate docking when using cleats or poles.

With your Ankarolina 24 mounted on the bow pulpit or under a hatch, docking is easy. To anchor, simply throw a grapnel into a cleft, and then straighten out the Ankarolina astern. Then you just cleat off your bow line.

Another way is to pull out ten to twelve feet of webbing, make fast the loop to the cleat and jump ashore with the coil running in your hand. Ankarolina pays out as much webbing as you need. At the same time you can hold the boat with the fixed end. You now have two webbings ashore, which gives you two bowlines of 40' (12 m) each.

With Krokolina at the end of the rope it is easy to change between the grapnel and a hook in a cliff, or if you want a temporary anchor using your main bow anchor.

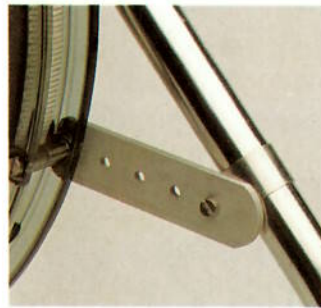

There are 8 optional attachment points on the reel. The most common methods of attachment are to the pulpits or bulkheads. The mounting kit is included.

If there isn't a rail or stanchion handy, use the mounting plate included in the mounting kit. The plate is also useful for attaching Ankarolina to bulkheads or to the underside of deck hatches.

The webbing can be detached from the reel hub, so that you can easily remove it from the spool. Guiding the line by hand will prevent it from twisting.


The mounting kit includes: Clips, screws and nuts (in stainless steel), spacer sleeves and mounting plate (in anodized aluminium).

The reel is made of high impact, UV-resistant plastic (smoke coloured). The webbing is flat, white polyester and can be washed in 104 degrees F (40 degrees C).

Every Ankarolina comes with a handle and reinforced loop for easy shackling.

Technical Data	Ankarolina 56	Ankarolina 35	Ankarolina 24
Application	Anchoring	Anchoring	Mooring
Reel	17" (430 mm)	11" (280 mm)	11" (280 mm)
Width	2.3" (59 mm)	2.3" (59 mm)	2.3" (59 mm)
Length	185' (56 m)	115' (35 m)	80' (24 m)
Breaking strength	5,500 lbs (2.5 tons) (14-16 mm web)	3,500 lbs (1.5 tons) (10-12 mm web)	5,500 lbs (2.5 tons) (14-16 mm web)
Weight	7.6 lbs (3.8 kg)	3.4 lbs (1.7 kg)	3.4 lbs (1.7 kg)


FIXOLINA® -the tie down

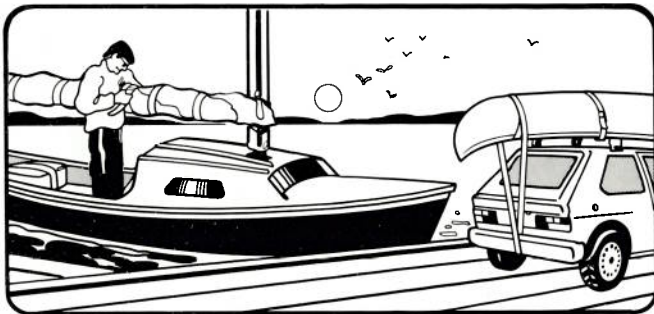

A universal tie in black or white polyester with a plastic clip available in either 11.5' (3.5 m) or 3.3' (1 m). The webbing width is 1" (25 mm). Excellent for tying up sails, sail covers and sprayhoods or securing items on board. Fixolina is also available with a combined winch stretcher and a lock of stainless steel and 16,5' (5 m) of extra strong webbing.

SAFEOLINA® -the safety line

For your safety on board, just shackle Safeolina to the stern or bow of your boat. Safeolina is flat and thus doesn't roll under your foot and endanger your balance. The webbing is made of black polyester and has a loop at one end and a stainless steel Krokolina at the other. This allows you to adjust the length according to your needs. The breaking strength is 5,500 lbs (2.5 tons).

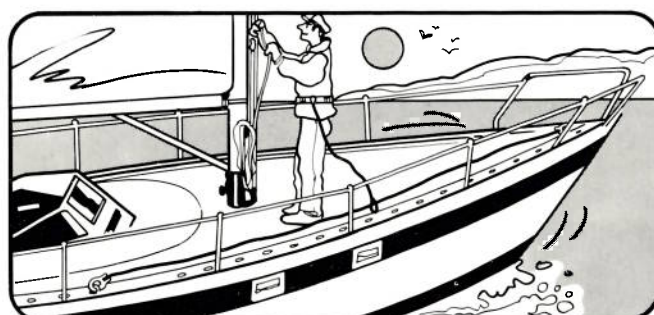

KROKOLINA® -the safety hook

Krokolina replaces both hook and shackle. The lock in Krokolina is stronger than both spliced and stitched loop. The construction of Krokolina is based on two reversed/inverted hooks attached to a hinge, which also protects the webbing from being cut. To open you just pull the hooks in opposite directions, when the webbing is not under tension.

Krokolina is perfect when you want to make a quick and easy change between the main anchor, chain and grapnel, or use Krokolina for mooring to a buoy or a hook in a cliff. To use Krokolina with your Ankarolina, you have to cut off the existing loop and burn the end of the webbing to prevent it from fraying. Krokolina is made of stainless steel and fits 1" webbing.



DISTRIBUTER:

